



# Dome Lights

## LDM2 Series

### For inspection of workpieces with curved and glossy surfaces

Perfectly suited for character inspection on a workpiece with a rippled and glossy surface or for illuminating bowl-shaped metal surfaces.



#### Even light emission with all direction illumination

Light generation without unevenness radiated in every direction. A high-intensity type of diffused light illumination. Allows shadowless radiation in applications with fast checking speeds as well.

Suitable for character inspection of workpieces with glossy surface and illuminating bowl-shaped metal surface such as can bottoms and workpieces with mirror finished surface such as ball bearings.

With direct light (LDR-70A-W)



With dome light (LDM-90BL)




LDM2 Series illuminates light from a wide diffusion area to encompass the entire workpiece. Curved metal surfaces etc. can be illuminated evenly. The bottom of aluminum cans can be illuminated evenly to highlight the letters only.

#### A heat dissipating architecture is adopted

Utilizing our original heat dissipating architecture, the rise in temperature is suppressed and degradation of intensity is reduced. (Refer to page 111.)

Structure of LDM2

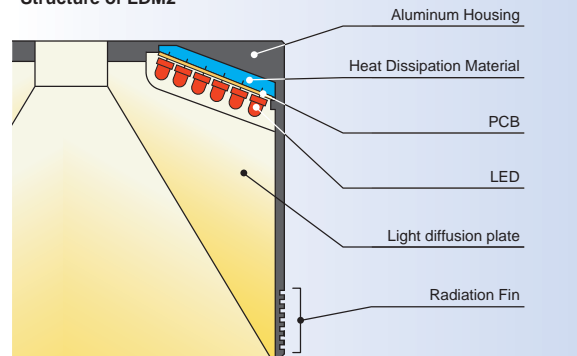

\*LDM2 Series has heat dissipating fins. Difference between CCS products and competitors' products is obvious.


With the conventional construction, the light was not able to dissipate heat with total efficiency due to the gap between the PCB and aluminum housing.

By employing a special heat dissipating enclosure between the PCB and the housing in the new construction, there is substantial absorption of heat generation from LED, and efficient heat conductivity into the housing. This new construction suppresses the temperature rise of LED sharply, providing stable images for a long period of time.

#### Illumination Structure of LDM2-90

It irradiates from all the directions of large diffusion side without any lighting unevenness.

Heat dissipating construction

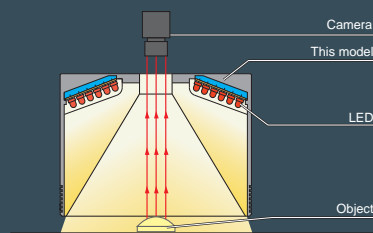

#### Examples of Dome Light Images

##### Electronic Parts Inspection

with ambient light



With direct light, the glare from bumpy and glossy surface disturb the pattern image.

Light used:LDR2-90RD



The diffused light illumination of the dome light emphasizes patterns, and eliminates glare.

Light used:LDM2-90RD



## Product Lineup Table

Series	Direct Number	Model Name	Color	Power Consumption	Option	Dimension
LDM2	1005542	LDM2-50RD2	●	24V / 3.6W	—	1
	1004306	LDM2-50SW2	○	24V / 5.0W		
	1006771	LDM2-50BL2	●			
	1000992	LDM2-50BL	TBD	24V / 5.3W		
	—	LDM2-50GR2	●	24V / 5.0W		
	1000993	LDM2-50GR	TBD	24V / 5.3W		
	1005543	LDM2-90RD2	●	24V / 14W	—	2
	1004299	LDM2-90SW2	○	24V / 18W		
	1006520	LDM2-90BL2	●			
	1000997	LDM2-90BL	TBD	24V / 18W		
	—	LDM2-90GR2	●	24V / 18W		
	1000999	LDM2-90GR	TBD	24V / 18W		

Products with the "TBD" mark are scheduled to be discontinued.

Refer to the discontinued product information on the CCS website for specific discontinuation schedules.

## Dimension Diagrams (Unit: mm)

